



Dimple Jacket (New Design)

- Designed for long servicelife.
- **New unique design reduces the risc of corrosion.**
- High max. pressure means higher possible flow and greater heat-transfer.
- PED approved in EN1.4404 and duplex SAF 2205 (EN 1.4462)
- Designed for the use in pharmaceutical applications.
- Can be used in all applications where high capacity and safety is needed.
- Designed according to EN 13445.
- **Fast delivery.**

50/100 pattern

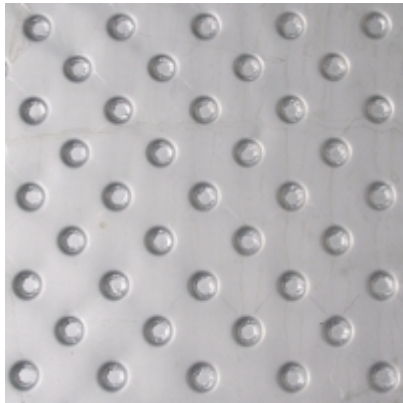

100/100 pattern

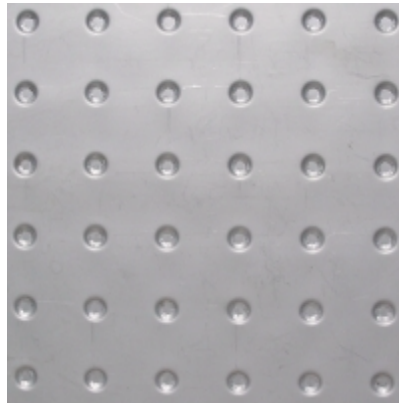

Cross section of a welded hole in the Dimple Jacket



Thickness = 1,5 mm. Backplate_{min} = 3,0 mm.

Item number	Material	T _{max} (°C)	P _{max} (bar)	Pattern (holes)
TS-DJ.15.100.100.4301/4404	EN 1.4301/1.4404	20	11,8	100/100
TS-DJ.15.100.100.4301/4404	EN 1.4301/1.4404	100	8,7	100/100
TS-DJ.15.100.100.4301/4404	EN 1.4301/1.4404	250	6,8	100/100
TS-DJ.15.050.100.4301/4404	EN 1.4301/1.4404	20	24,7	50/100
TS-DJ.15.050.100.4301/4404	EN 1.4301/1.4404	100	18,2	50/100
TS-DJ.15.050.100.4301/4404	EN 1.4301/1.4404	250	14,4	50/100
TS-DJ.15.050.100.4462	EN 1.4462	20	41,4	50/100
TS-DJ.15.050.100.4462	EN 1.4462	100	31,0	50/100
TS-DJ.15.050.100.4462	EN 1.4462	250	25,8	50/100