

Tank Ventiler

TS-A50.100.100.SS (There are no translations available)




Max. 100 M³/h

- Udluftningsventil til tanke anvendt indenfor bl.a. fødevarerindustrien.
- To-vejs virkende.
- Udført i AISI316L (EN 1.4404)
- Lagerføres.
- Max flow 100 M³/h.

Item no.	Capacity (M ³ /h)	D _{bore} (mm)	H _{total} (mm)	Material	Wt (kg)
TS-A50.100.100.SS	100	102	240	AISI316L	2,5

Sketch

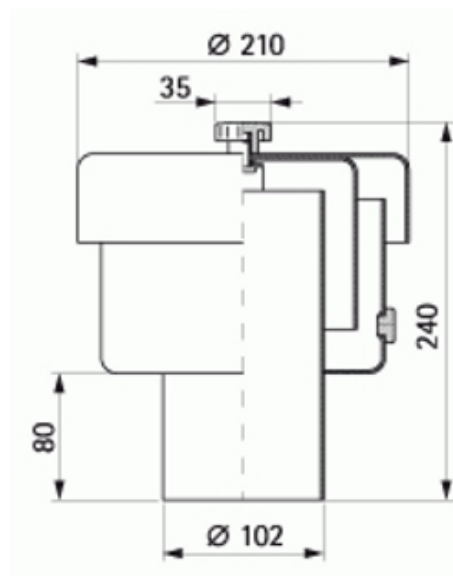

Item no. breakdown:

Eks. TS-A50.100.100.SS

-**TS**- = Tec Scandinavia

-**TS-A50** = Type no. (A = Air valve)

-**TS-A50.100.** = Capacity Inn (M³/h)

-**TS-A50.100.100.** = Capacity Out (M³/h)

-**TS-A50.100.100.SS.** = Material